
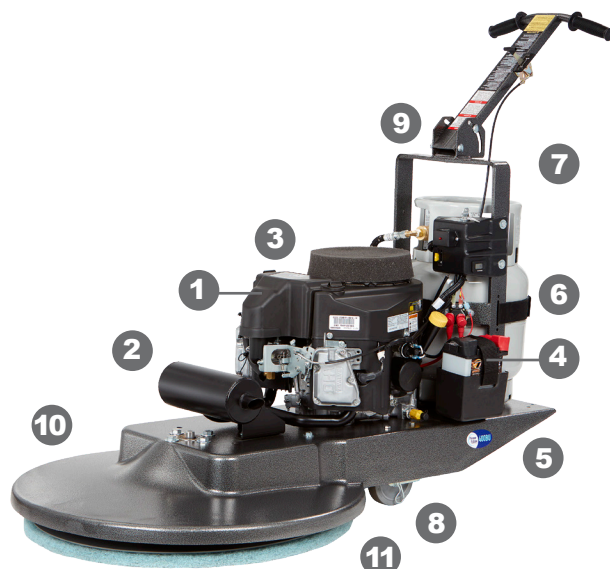


# 400BU Propane Floor Burnisher

**34% more fuel efficient**

*Reduces operating costs.*

- 1 SAFI  to keep emissions low even when the air filter is dirty.
- 2 Catalytic muffler exceeds EPA and CARB minimum requirements.
- 3 Easy access filters for simple cleaning.
- 4 Easy access battery and oil reservoir for quick maintenance.
- 5 Rok-Bak™ action allows for quick and easy pad change.
- 6 Quick release cylinder strap for fast tank change.
- 7 Triple anchor welded handle support for long lasting maneuverability.
- 8 Soft tread adjustable wheels for smooth operation and pad pressure adjustment.
- 9 Adjustable ergonomic handle for improved operator comfort.
- 10 "Hot @ 4 o'clock" setup for true and straight operation.
- 11 American made aluminum castings and sealed AGM battery.



Featuring an 18 HP 603 cc engine from:

**Kawasaki**  
Engines

## RECOMMENDED PRODUCTS



Amano Pioneer Eclipse offers a wide variety of premier floor finishes to meet the needs of every consumer. Floor Finish lines include both traditional and green offerings.



**SAFESTOP**

The patent-pending SafeStop feature detects improper propane cylinder use and automatically shuts down the machine, if such use is detected, reducing the risk of the most common source of fire hazard, and preventing elevated emissions and fuel system/engine/catalyst damage. SafeStop is available as an option on all 400BU models.

## AVAILABLE MODELS

- 400BU21BM: 21" Propane Burnisher (Battery Start)
- 400BU21BSM: 21" Propane Burnisher (Battery Start, Steel Tank)
- 400BU21BSMX: 21" Propane Burnisher (Battery Start, Steel Tank, EcoSense™)
- 400BU21BSMXP: 21" Propane Burnisher (Battery Start, Steel Tank, EcoSense™, SafeStop)
- 400BU28BM: 28" Propane Burnisher (Battery Start)
- 400BU28BSM: 28" Propane Burnisher (Battery Start, Steel Tank)
- 400BU28BSMX: 28" Propane Burnisher (Battery Start, Steel Tank, EcoSense™)
- 400BU28BSMX: 28" Propane Burnisher (Battery Start, Steel Tank, EcoSense™, CYLI, SafeStop)

## TECHNICAL DATA

<b>Performance</b>	21" (53 cm): 25,000 ft <sup>2</sup> /hr (2300 m <sup>2</sup> /hr)
	28" (71 cm): 34,000 ft <sup>2</sup> /hr (3160 m <sup>2</sup> /hr)
<b>Pad Size</b>	21" (53 cm)
	28" (71 cm)
<b>Pad Speed</b>	21" (53 cm): 2000 rpm
	28" (71 cm): 1500 rpm
<b>Engine</b>	603 cc
<b>Noise Level</b>	< 89 db(A)
<b>Width</b>	21" (53 cm): 22.8 in (58 cm)
	28" (71 cm): 32.5 in (83 cm)
<b>Length</b>	21" (53 cm): 48 in (122 cm)
	28" (71 cm): 64.2 in (163 cm)
<b>Weight</b>	21" (53 cm): 187 lb (85 kg)
	28" (71 cm): 200 lb (91 kg)
<b>Warranty</b>	Machine: Parts & Labor - 1 yr*
	*Excludes wear and maintenance items

